


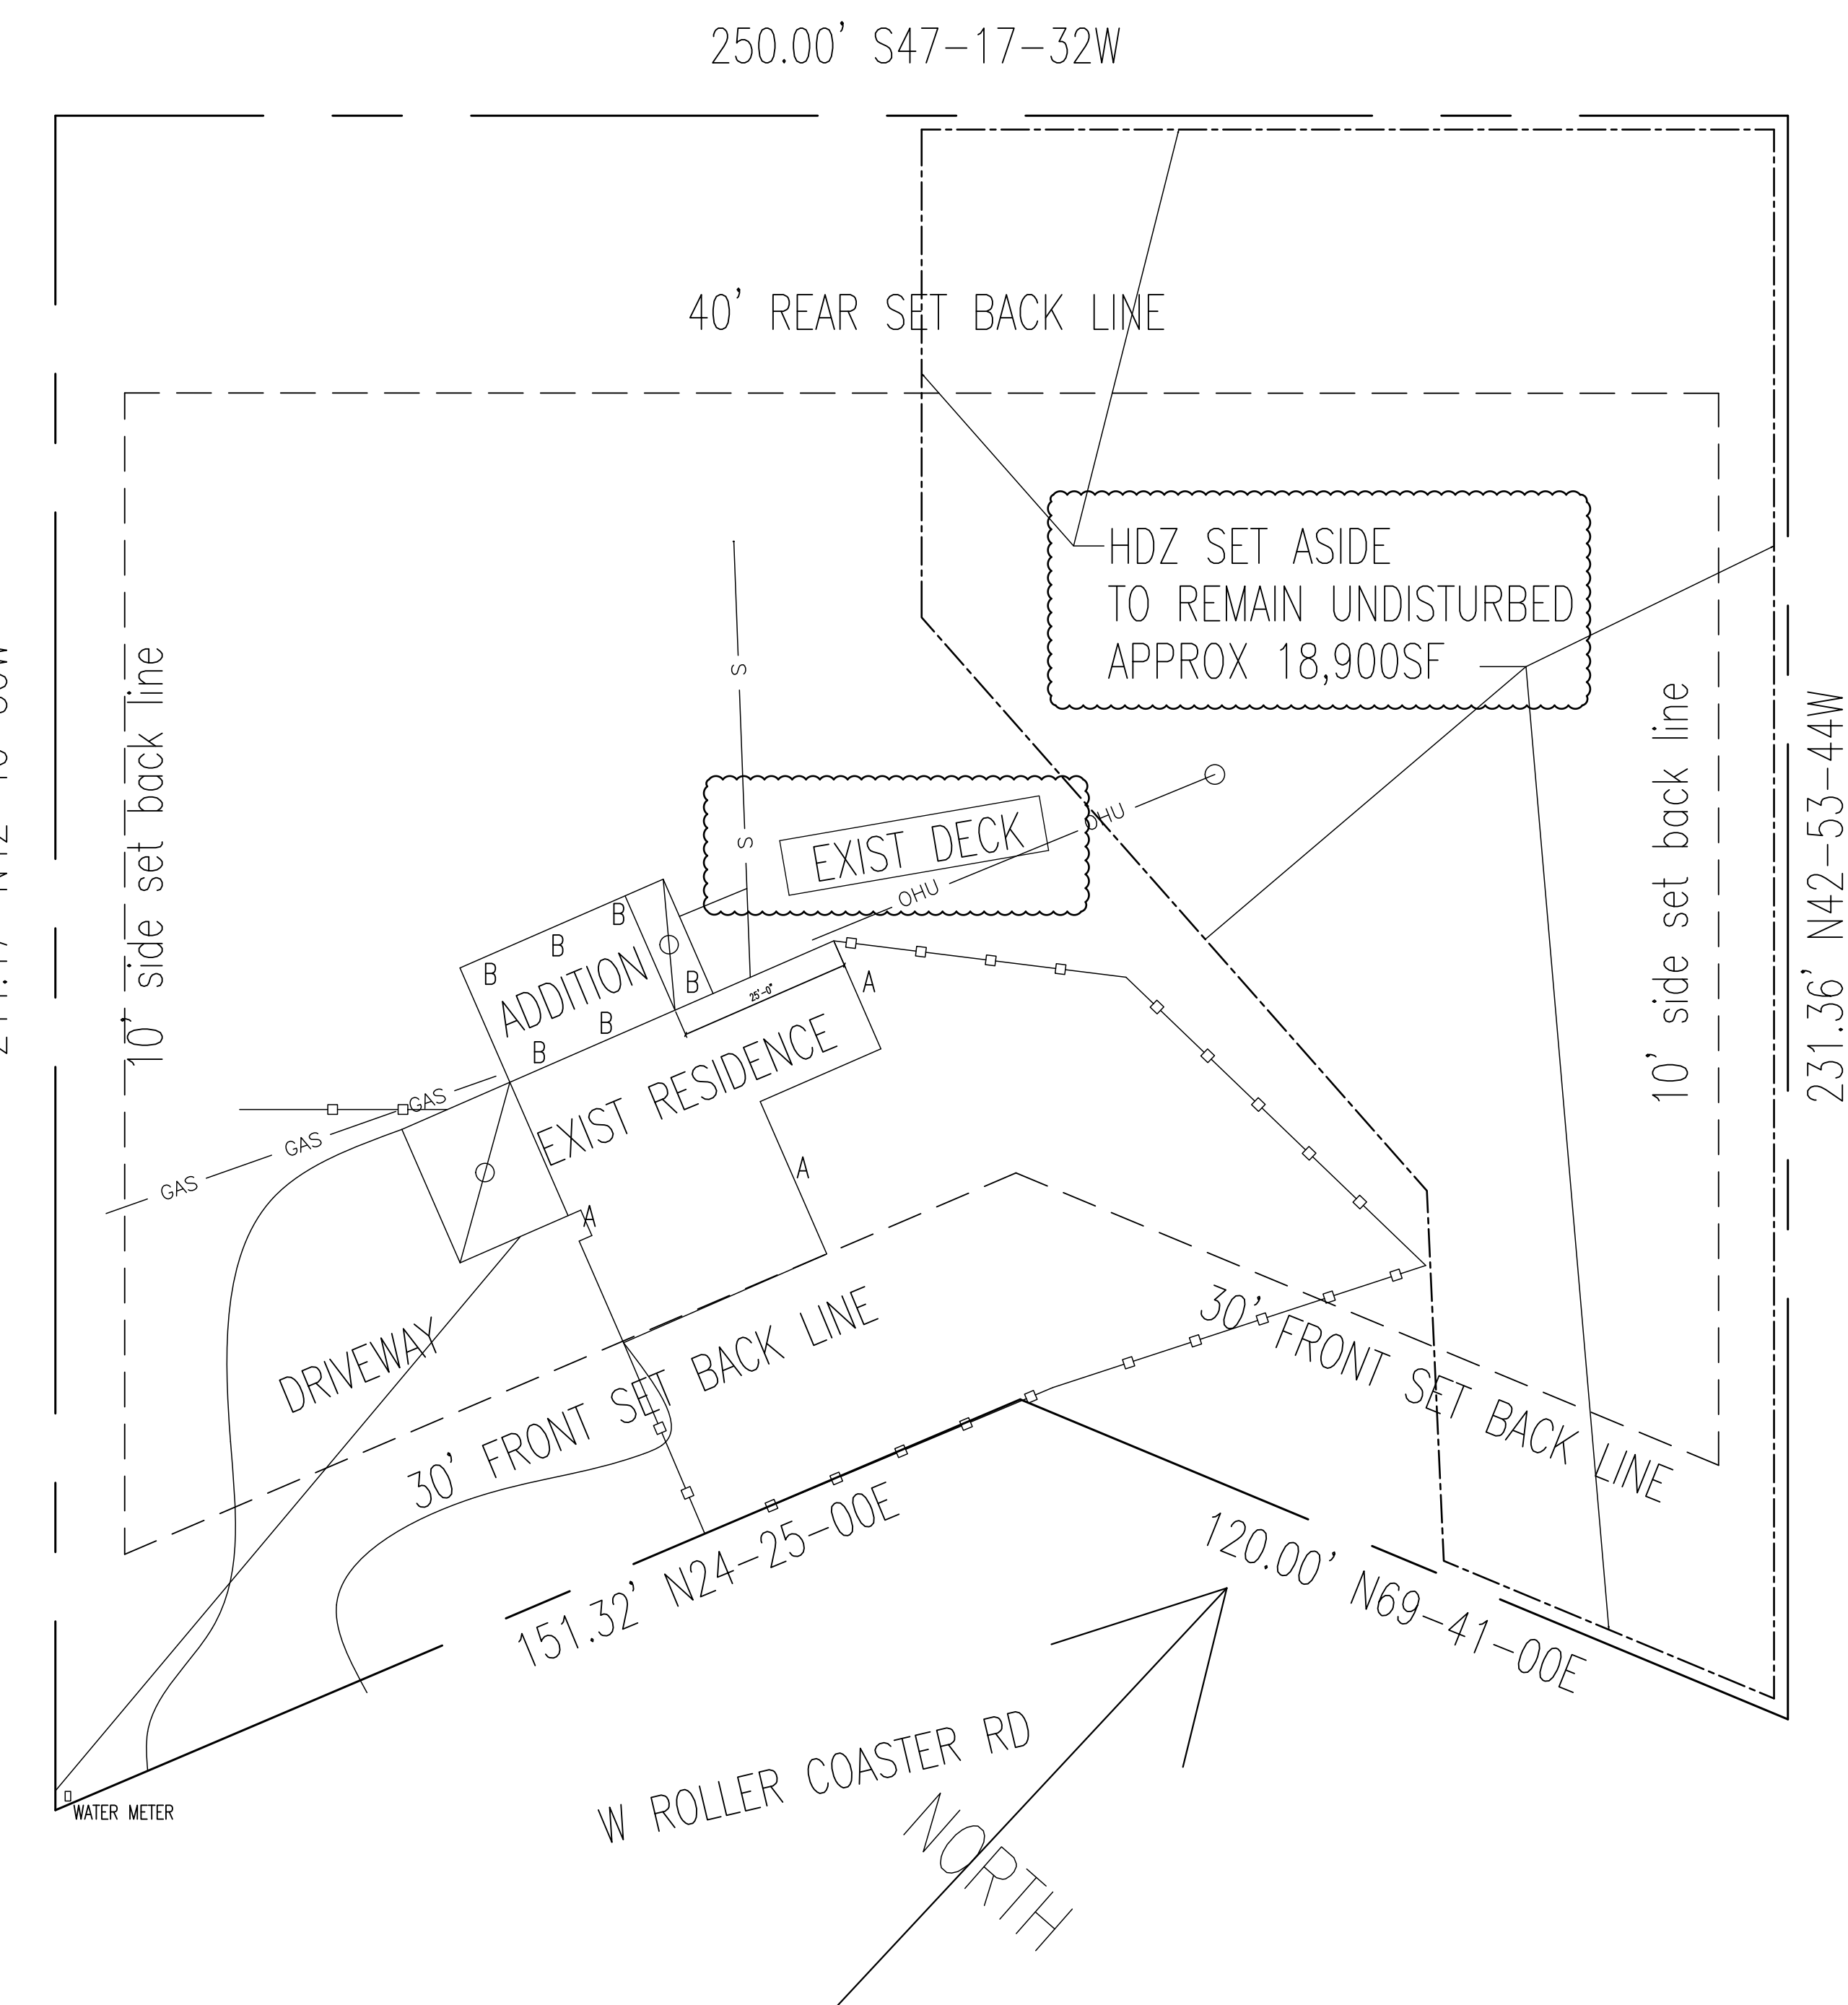

1. PROJECT IS LOCATED IN LIGHTING AREA E3a

2. TOTAL SITE: 1.22 AC

3. TOTAL ALLOWABLE LUMENS

TOTAL = 39,000 X 1.22 = 47,580

4. ACTUAL-INSTALLED LUMENS

FIXTURE	QUANTITY	LU/EA	SHIELDED?	TOTAL LU
EXISTING A	3	2000	YES	6,000
NEW-DECK LITES "B"	6	170	YES	1020
TOTAL	9		YES	7020 LUMENS

W ROLLER COASTER RD

ORANGE GROVE RD

ORACLE RD

RIVER RD

LOCATION PLAN

NTS

NORTH

Project TH&D6	Sheet A1 1 OF 7
Date NOV 2024	
Drawing By DB	



 All 2-foot Contours Topography
 Parcels
 Washes
 1000-2000 CFS

Riparian Habitat - Pima County
Effective 10/20/2005

 **Xeroceptan B**

1000 W ROLLER COASTER RD
PARCEL:102-17-1160

NORTHERN HILLS ESTATES
RESUB OF LOTS 68-81, 84
75 & 96 LOT 136

No.	Revision/Issue	Date
	review comments X/XX/XX	

FLOODPLAIN PLAN
YEAGER RESIDENCE
1000 W ROLLER COASTER RD
PIMA COUNTY, AZ 857XX

Drafting Firm
DALE BOOTH
3849 E. BROADWAY BLVD STE 251
TUCSON, AZ. 85716
(520) 982-4259

Engineering Firm

Contracting Firm

Project Name and Address
YEAGER BEDROOM
1000 W ROLLER COASTER RD
PIMA CTY, AZ


Project
TH&D6

Date
NOV 2024


Drawing By
DB

Sheet


A1

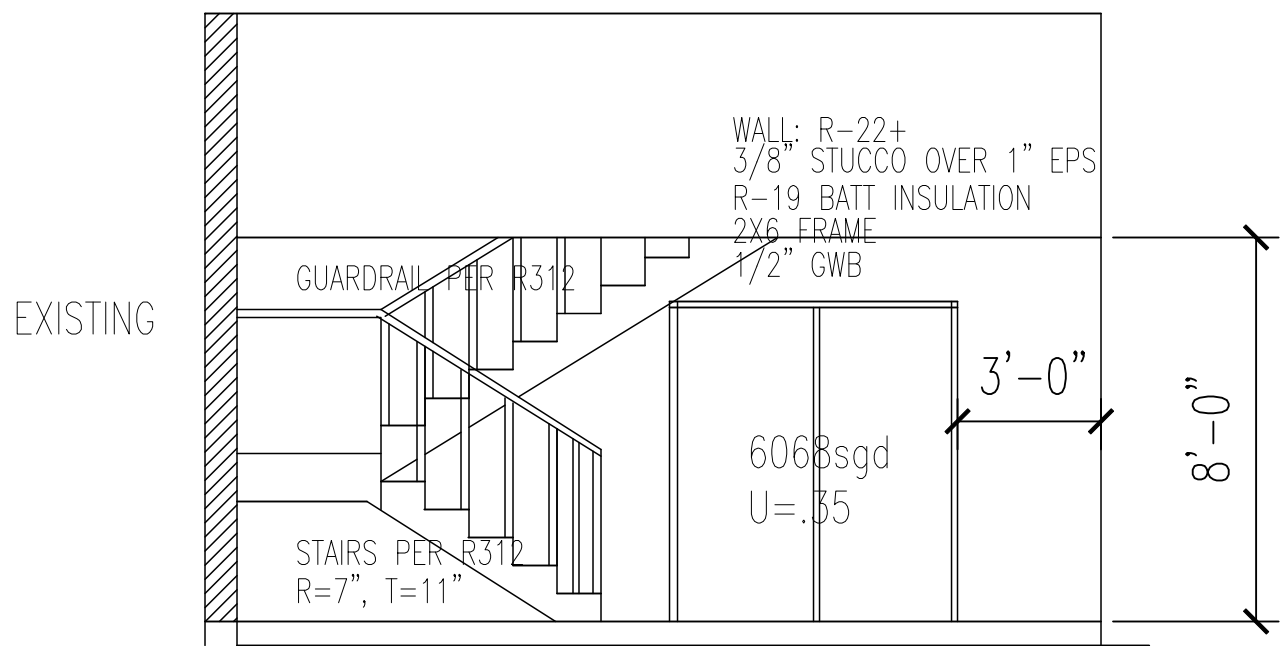

east elevation

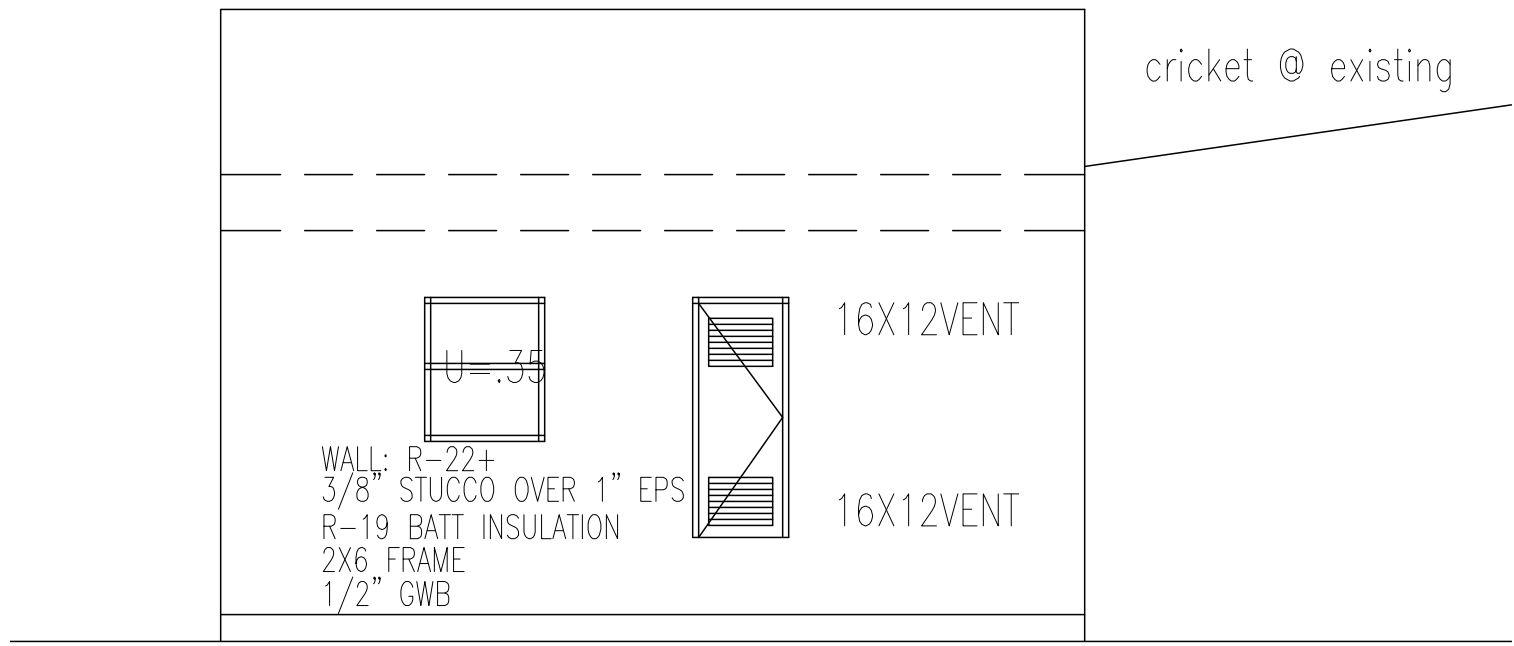

WEST elevation

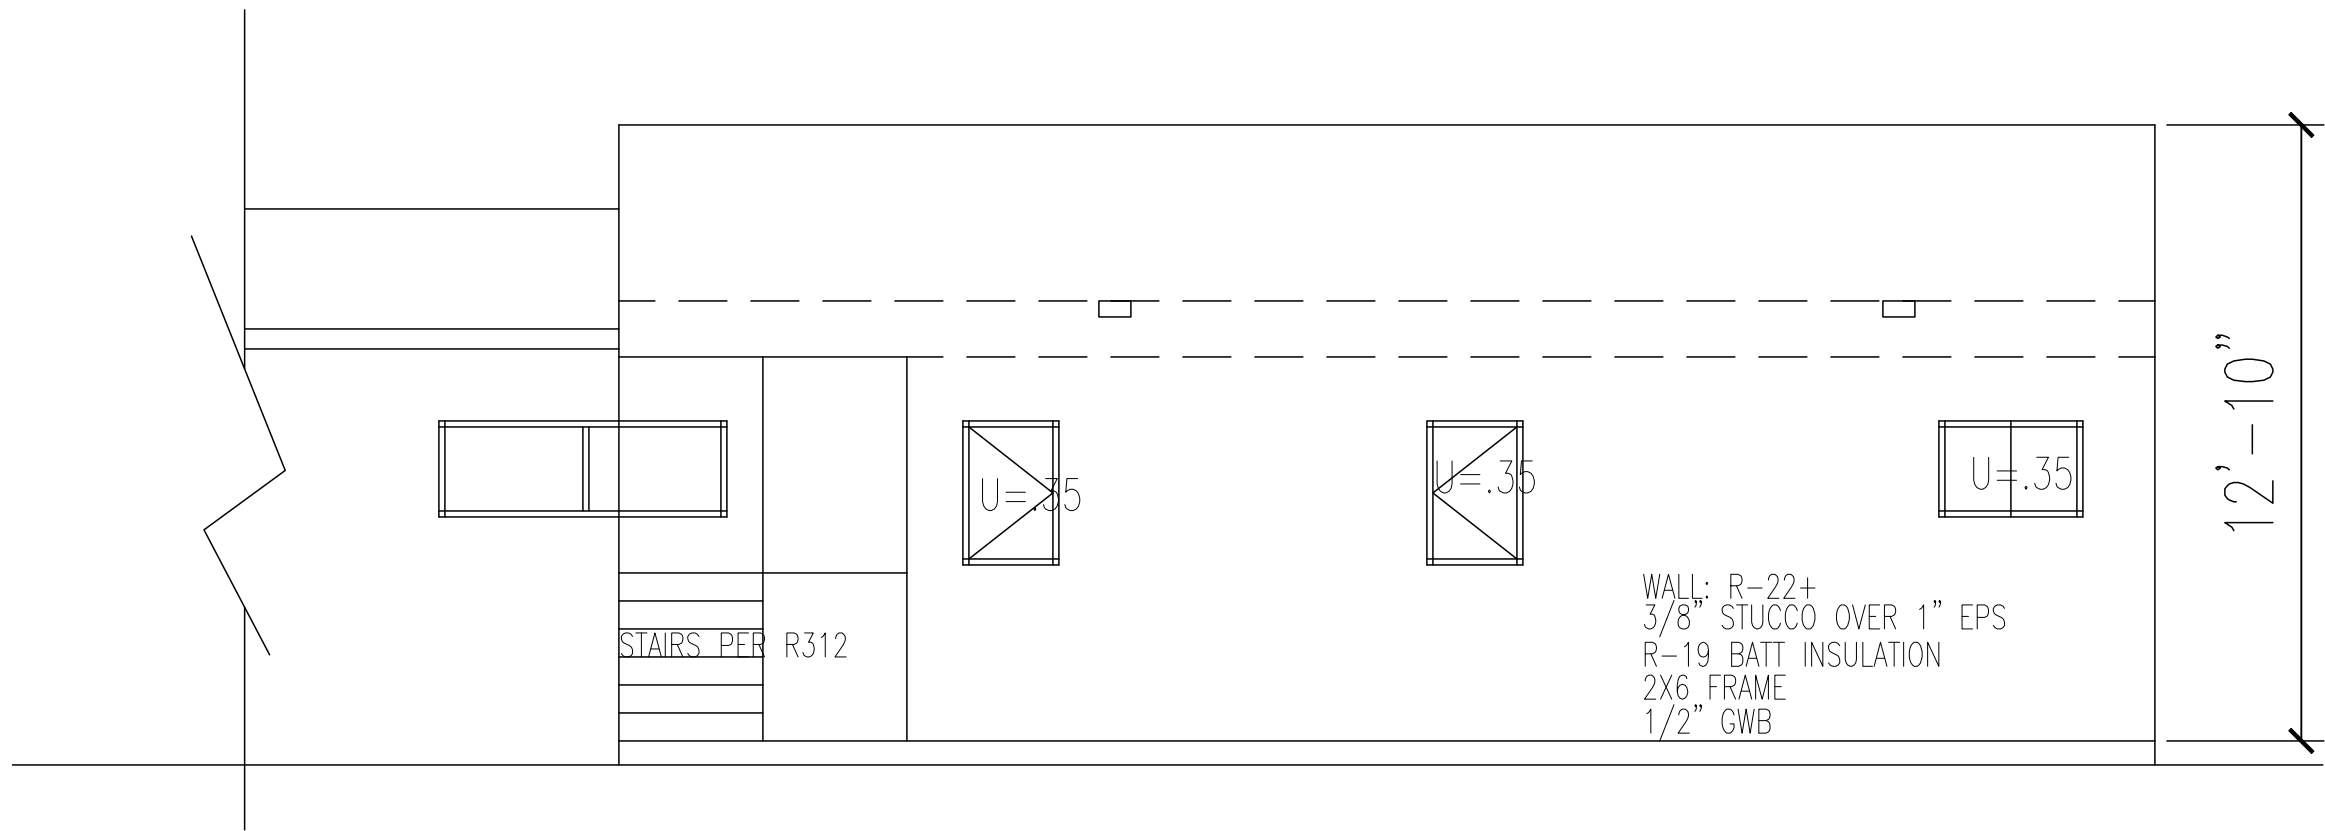

north elevation

ELEVATION AND SECTION NOTES:

- ALL WALL COVERINGS, MATERIALS, AND INSTALLATION SHALL COMPLY WITH 2018 IRC CHAPTER 7.
- EXTERIOR WALLS:
2X6's @ 16@ O.C. @ BEARING DF#2 OR BETTER
2X4's @ 16 @ O.C. @ EXISTING ADOBE WALL
WITH 3/8" WITH 1 @ T & G EPS FOAM BOARD (R-3.6+)
WITH METAL LATH AND 2 LAYERS OF KRAFT PAPER
WITH 3/8"@ F.G. REINF. SYNTHETIC STUCCO PER R703.9 AND ICBO ER-4226
WITH R-19 (MIN) F.G. BATT INSULATION
WITH 1/2 @ GWB, INTERIOR TAPE, & TEXTURE
- ROOF/CEILING ASSEMBLY:
I-JOISTS PER FRAMING PLAN
W/ 1/2"GWB @ CEILING TAPE & TEXTURE
W/ VAPOR BARRIER IF ROOF VENTING AT 1/300 PER IRC R806.2 OR PER LOCAL MADIFICATIONS.
W/R-38 F.G. BATT INSULATION
W/3/4" APA 32/16 CDX T&G
W/ F.G. REINFORCED 3-PLY BUILT-UP ROOFING SYSTEM PER R903 OR OWNER APPROVED "OR EQUAL"
- INTERIOR PARTITIONS:
2X4's OR 2X6's PER FLOOR PLAN WOOD @ 16 TO 24 @ O.C. @ NON-BEARING. WOOD 2X's @ AT BEARING.
WITH 1/2"@ GWB EACH SIDE TAPE & TEXTURE WATER RESISTIVE GWB @ BATHROOMS & ABOVE KITCHEN COUNTER TOPS.
SHOWER ENCLOSURE TO BE WATER RESISTANT TO A MIN. 72 ABOVE DRAIN PER 2000 IRC P2708 & R307.
- WINDOWS TO BE INSULATED, DOUBLE PAINED WITH VINYL SASH. INSTALL PER MFG SPECS. BEDROOM WINDOWS TO HAVE MIN. 20" WIDE OPENINGS AND SILL HEIGHT NOT TO EXCEED 44" ABOVE FLOOR PER 2018 IRC R308, R613 & R310.
- EXPOSED WOOD COLUMNS, BEAMS, AND LINTELS TO BE STAINED OR SEALED WITH CLEAR WATERPROOFING.
- FINISH FLOOR ELEVATION TO BE MINIMUM OF 6"@ ABOVE FINISH GRADE.
- ~~PRE-MANUFACTURED WOOD-TRUSSES PER IRC R802.10.~~
- TYPICAL HEADER HEIGHT FOR DOORS AND WINDOWS IS 6'-10" UNLESS NOTED OTHERWISE.
- LINTELS AND BEAMS PER FRAMING PLAN.
- LEDGERS AND HARDWARE PER FRAMING PLAN.
- MONOLITHIC SLAB ON 4"COMPACTED ABC FILL WITH REINFORCING PER FOUNDATION PLAN.
- BLOCKING AND FIRESTOPS PER 2018 IRC R602.8.
- USE REDWOOD OR PRESSURE TREATED SILL PLATES THRU-OUT PER 2003 IRC R319, R320, & R404.4.7.2.
- PROVIDE ADEQUATE DRAINAGE PER 2018 IRC R401 & R405.
- EXPOSED LINTELS ARE OPTIONAL AND MAY BE SUBSTITUTED WITH HEADERS AS REQUIRED FOR OPENING.

No.	Revision/Issue	Date
	reveil comments X/XX/XX	

MST BEDROOM ADDITION
YEAGER RESIDENCE
1000 W ROLLER COASTER RD
PIMA COUNTY, AZ 857XX

Drafting Firm
DALE BOOTH
3849 E. BROADWAY BLVD STE 251
TUCSON, AZ, 85716
(520) 982-4259

Engineering Firm

Contracting Firm

Project Name and Address
YEAGER BEDROOM
1000 W ROLLER COASTER RD
PIMA CTY, AZ

Project TH&D6	Sheet A3 3 OF 7
Date NOV 2024	
Drawing By DB	



1. ALL MECHANICAL WORK SHALL BE DONE ACCORDING TO SMACNA LOW PRESSURE STANDARD AND CONSTRUCTION.
2. ALL PIPING SHALL CONFORM TO IRC STANDARDS.
3. ALL SUPPLY AND RETURN AIR DUCTS TO BE MIN R-6
4. ALL WORK SHALL BE IN ACCORDANCE W/IRC AND LOCAL AMENDMENTS.
5. ALL FLEXIBLE DUCT MUST BE OF UL CAACS 1 AIR DUCT MUST MEET THE STANDARDS OF UFPA 90A & 90B.
6. MECHANICAL CONTRACTOR MAY SUBSTITUTE WITH EQUIVALENT EQUIPMENT FROM OTHER MFG WITH OWNER/AGENT APPROVAL.
7. METAL DUCTWORK SHALL BE CONSTRUCTED OF 28GA GALVANIZED TO SMACNA AND 2003 IRC CHAPTER 16.
8. DUCTWORK TO BE LOCATED AT TRUSSES UNLESS NOTED OTHERWISE.
9. PROVIDE PLATFORM (MIN. 18" HT.) @ FAN COIL
VERIFY REQUIRED HEIGHT @ FAN COIL FOR VERTICAL FLOW OF RETURN AIR. PROVIDE PLATFORMS AS REQUIRED AT RETURN AIR GRILLS. PROVIDE PROPER CLEARANCE PER MFG SPECS AND M1307.
10. PROVIDE WEATHER PROOF SHUT-OFFS AT ALL EQUIPMENT LOCATED OUTSIDE.
11. PROVIDE WEATHER-PROOF 120V RECP WITHIN 6" OF ALL HVAC EQUIPMENT LOCATED OUTSIDE
12. EXHAUST FANS TO BE VENTED THRU WALL W/ DAMPER PER IRC 303.4
13. PROVIDE CU LIQUID LINE AND VAPORLINE,
SHEATHED AND INSULATED FROM A/C COMPRESSOR TO AIR HANDLER WHEN REQUIRED. VERIFY LINE REQUIREMENTS WITH MFG SPECS
14. MECHANICAL CONTRACTOR SHALL GIVE THE OWNER ONE COMPLETE SET OF OPERATING AND MAINTENANCE INSTRUCTIONS AND SHALL GUARANTEE THE ENTIRE SYSTEM FOR ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE BY THE OWNER.
15. MECHANICAL CONTRACTOR SHALL PROVIDE VTW FOR WATER HEATER
16. FLEX DUCT TO BE MIN R-8
17. PROVIDE BLOWER DOOR TEST AS REQUIRED

1. CLIMATE ZONE 4
2. HDD CATEGORY: 1,500-1,999
3. MINIMUM ELEMENT INSULATION VALUES PER TABLE N1102.1
GLAZING: U=0.75
CEILING: R-26
WALLS: R-13

Generated by REScheck-Web Software
Compliance Certificate

Assembly	Gross Area or Perimeter	Cavity R-Value	Cont. R-Value	Prop. U-Factor	Req. U-Factor	Prop. UA	Req. UA
Window 4: Vinyl Frame SHGC: 0.22 Orientation: Unspecified	6			0.350	0.400	2	2
Wall 3: Wood Frame, 16" o.c. Orientation: Unspecified	144	19.0	3.6	0.048	0.084	5	9
Door: Glass Door (over 50% glazing) SHGC: 0.22 Orientation: Unspecified	41			0.350	0.400	14	16

Compliance Statement: The proposed building design described here is consistent with the building plans, specifications, and other calculations submitted with the permit application. The proposed building has been designed to meet the 2018 IECC requirements listed in REScheck Version 9: REScheck-Web and to comply with the mandatory requirements listed in the REScheck Compliance Checklist.

DATE POOTH DESAI/ALB Signature 12/15/24
 Name - Title Date

No.	Revision/Issue	Date
	revei comments X/XX/XX	

MST BEDROOM ADDITION
YEAGER RESIDENCE
1000 W ROLLER COASTER RD
PIMA COUNTY, AZ 857XX

Drafting Firm
DALE BOOTH
3849 E. BROADWAY BLVD STE 251
TUCSON, AZ. 85716
(520) 982-4259

Engineering Firm

Contracting Firm

Project Name and Address
YEAGER BEDROOM
1000 W ROLLER COASTER RD
PIMA CTY, AZ

Project TH&D6	Sheet A6 6 OF 7
Date NOV 2024	
Drawing By DB	



1. ALL WORK SHALL COMPLY TO IRC 2018 AND CURRENT LOCAL BUILDING CODES.
2. ALL FIXTURES TO BE UL APPROVED. USE 12/2 WIRE U.N.O. VERIFY WIRING REQUIREMENTS OF HVAC EQUIPMENT.
3. ELECTRICAL SUPPLY TO BE LOCATED AT FRAMING FROM EXISTING MAIN PANEL
4. EXISTING RISER AND PANEL LOCATED AS INDICATED
GROUND PER. IRC E3607. BOND PER IRC 3609
5. SUB-BREAKER PANEL TO BE LOCATED WITHIN ADDITION WITH SHUT-OFFS
LOCATED AT HVAC EQUIPMENT.
6. ELECTRICAL LOCATIONS SHOWN ARE APPROXIMATE U.N.O. LIGHTING LOCATIONS
TO NOT INTERFERE WITH HVAC. RECEPTACLE SPACING PER E3801.
7. DISCONNECTS AT HVAC EQUIPMENT SHALL NOT BE SUPPORTED BY OR
ATTACHED TO HVAC EQUIPMENT.
8. PROVIDE SMOKE DETECTORS PER 2017 NEC AND 2018 IRC 313. LOCATE MIN. OF 36"
FROM MECHANICAL SUPPLY OR RETURN GRILL. LOCATE AS INDICATED U.N.O.
9. ALL RECEPTACLES SERVING GARAGE TO BE GFCI PER IRC E3802
10. CONTRACTOR SHALL VERIFY EXACT LOCATIONS OF MECHANICAL EQUIPMENT PRIOR TO
ROUGH-IN AND COMPLY AS REQUIRED.
11. PROVIDE LIGHT FIXTURES IN COMPLIANCE WITH HIGH EFFICACY LAMPS REQUIREMENTS

LIVING AREA	468SF @ 3W EA	1404
GFI OUTLETS 2 @ 1500 EA.		3000
RV RECEPTACLE		11500
SUBTOTAL		15904
1st 10 KW @ 100%	10000	
REMAINED @ 40%	2362	
TOTAL WATTAGE	12,362 =	53.7 AMPS
HVAC @ 100%		10.9 AMPS
SUB-PANEL TOTAL LOAD		64.6 AMPS

LIVING SPACE	1525 S.F. @ 3W EA	4575
KITCHEN CIRCUITS 2@ 1500 EA.		3000
GFI CIRCUITS 2@ 1500 EA.		3000
DISHWASHER		1500
WASHER		1500
DISPOSAL		1100
PANEL @ NEW ADDITION		12362
SUBTOTAL		27037
1st 10 KW @ 100%	10000	
REMAINED @ 40%	6815	
TOTAL WATTAGE	16815/230 =	73.1 AMPS
EXIST HVAC @ 100%		39.5 AMPS
HVAC @ ADDITION		10.9 AMPS
TOTAL LOAD		123.5 AMPS

OUTDOOR LIGHTING CODE COMPLIANCE

1. PROJECT IS LOCATED IN LIGHTING AREA E3a
2. TOTAL SITE: 1.22 AC
3. TOTAL ALLOWABLE LUMENS
TOTAL = 39,000 X 1.22 = 47,580
4. ACTUAL INSTALLED LUMENS
- | FIXTURE | QUANTITY | LU/EA | SHIELDED? | TOTAL LU |
|--------------------|----------|-------|-----------|-------------|
| EXISTING A | 3 | 2000 | YES | 6,000 |
| NEW-DECK LITES "B" | 6 | 170 | YES | 1020 |
| TOTAL | 9 | | YES | 7020 LUMENS |

NEW

ELECTRICAL PANEL 220V 1PH 60HZ					100 AMP SUB-PANEL		
CR. #	BRK. SIZE	AWG. SIZE	USE	USE	AWG. SIZE	BRK. SIZE	CR. #
1	2		HEAT PUMP	WATER HEATER		20	2
3	20			OS RECEPTACLES		20	4
5	20		OS LTS	BATH LTS		20	6
7	20		BEDRM RECEPTACLES	BEDRM RECEPTACLES		20	8
9	2		RV RECEPTACLE	BEDROOM LTS		20	10
11	50					20	12
13	20		BATH GFI			20	14
15	20		EX FANS	SMOKE DETECTORS		20	16
17	20					20	18
19	20					20	20
21	20					20	22
23	20					20	24

MST BEDROOM ADDITION
YEAGER RESIDENCE
1000 W ROLLER COASTER RD
PIMA COUNTY, AZ 857XX

Engineering Firm

Contracting Firm

Project	TH&D6
Date	NOV 202
Drawing By	DB

Sheet

A7

7 OF 7